

ingenico

SELF/5000

Compact, engaging and scalable all-in-one payment solution for your self-service business



- Accept all payment methods including magstripe, EMV and NFC/Contactless and QR codes
- Easily integrate cashless payment in self-service business like vending or indoor kiosks
- Simplify solution integration, operation and scalability



The Self/5000, an all-in-one device designed to grow your self-service business.

All methods of payment accepted including QR-code based payment

Ruggedized:

- Designed for intensive use cases: IK09
- Indoor
- Outdoor within the limits of IP44

Easy integration:

- Can be integrated into a kiosk from the front or from the rear
- Compliant with EVA EPS (Standard Door Module) standard, the Self/5000 can easily replace the older solutions


High level of security with PCI PTS certification

Modularity:

- Add-on boxes to build the desired configurations (Power, MDB, EXE, Wireless)
- Upgradeable in the field

Ergonomic interface:

- Easy-to-use customer interface thanks to a simple UI
- Color and capacitive touch screen

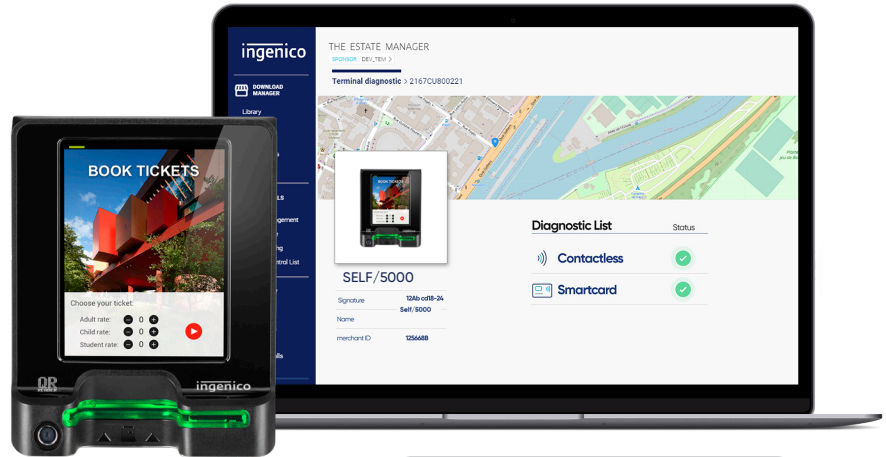

Supported by Ingenico's suite of services

- Fleet management & security solutions
- Hardware services
- Professional services

Specifications

Processor/OS	• Cortex A5 - Telium TETRA	✓	Terminal connectivity	• Ethernet 10/100, 1 x RJ45 LAN port • 4G	✓ Option
Memory	• 512 MB Flash, 512 MB RAM • MicroSD up to 32GB	✓ ✓	Security	• PCI PTS 5.1 certified • PIN on Glass certified	✓ ✓
Contactless reader	• EMV Contactless L1 2.6 certified / Support ISO 14443	✓	IP	• IP 44	✓
Contact reader	• Hybrid card reader with shutter • RGB LEDs in reader's entry mouth • Smart card – EMV L1 – 500k reads lifespan • MSR ISO 1/2/3 – 500k reads lifespan	✓ ✓ ✓ ✓	IK	• IK 09	✓
SAM	• 2xSAM ID-000	✓	Power supply	• 9-16 V DC (light sleep mode) • 10-45V DC with optional Add-on box	✓ Option
Display	• 3.26" color QVGA (240x320)	✓	Terminal size	• EVA EPS - Standard Door Module • 85 (W) x 1072 (H) x 109.6 (D) mm (3.3x4.2x4.3")	✓ ✓
Touchscreen	• Capacitive - 6mm glass thickness	✓	Weight	• 620 g (22 oz)	✓
Keypad	• Virtual keyboard on screen	✓	Environment	• -20°C to +70°C (-4°F to 158°F) - Operating • -20°C to +70°C (-4°F to 158°F) - Storage • 95% non-condensing at +55°C (131°F)	✓ ✓ ✓
Audio	• Buzzer Monotone • Wav sound (thru external speaker)	✓ ✓	Mounting in the kiosk	• From outside without EVA plate • From inside with EVA plate	✓ ✓
Camera	• 2MP - fixed focal (Honeywell library embedded)	Option	Accessory	• Adapter cable for standard 12V PSU • EVA EPS mounting steel plate • USB cables, serial cables... • PSU 12V DC...	✓ ✓ Option Option
Terminal connections	• 1 x USB Slave • 2 x USB Host • 2 x RS232 • 1 x connector for external loudspeaker • 1 x MDB Master + 1 x MDB Slave	✓ ✓ ✓ ✓ Option	Add-on boxes	• POWER add-on box (slot#1) • MDB or EXE add-on box (slot#2) • 4G add-on box (slot#2)	Option Option Option

